

# Walk on Roof Light

33mm Toughened heat soak laminated glass

## TECHNICAL


Domestic application - uniformly distributed load (UDL) from 4.0 kn/m<sup>2</sup>

Manufactured to:

BSEN - 12150

BSEN - 14449

BSEN - 14179

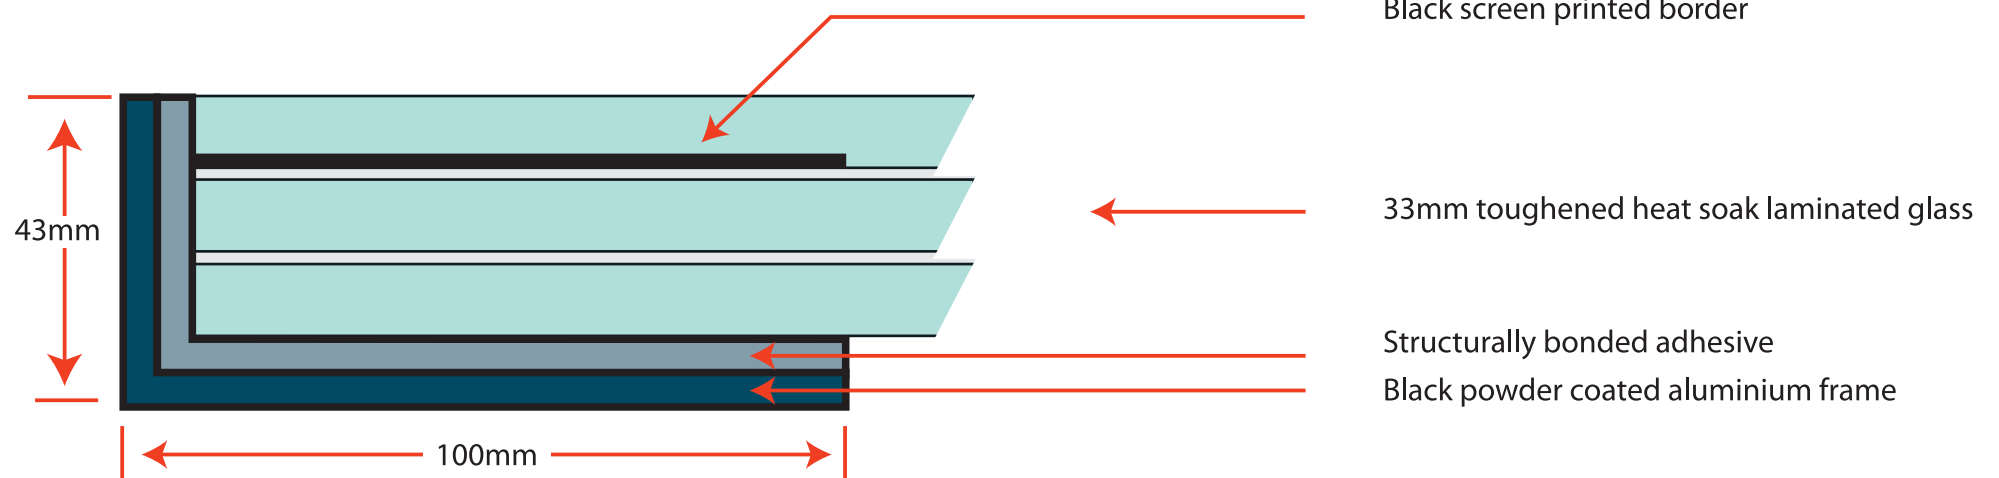

\* For illustrative purposes only.

glow

TUFFX  
GLASS MANUFACTURERS