




TECHNICAL
Domestic application - uniformly distributed load (UDL) from 1.5 kn/m ²
Manufactured to:
BSEN - 12150
BSEN - 14449
BSEN - 14179

Walk on Roof Light

25.5mm Toughened heat soak laminated glass with aluminium frame

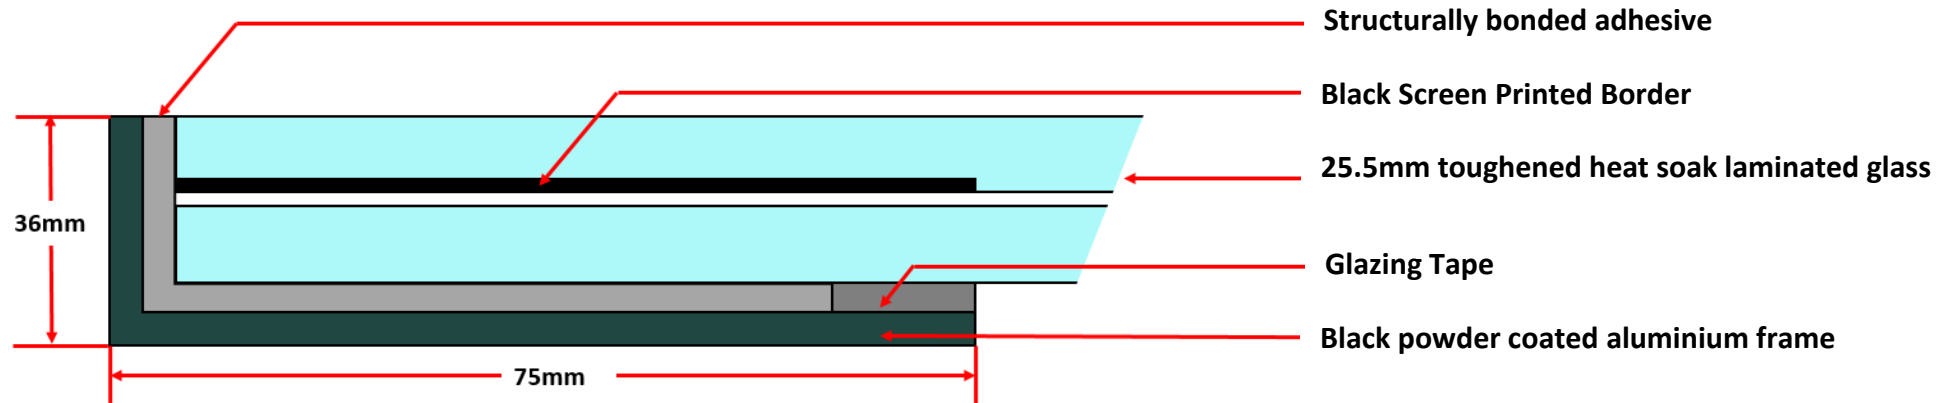

* For illustrative purposes only

Please note it is the responsibility of the customer to ensure that all products purchased and used are compliant with Building Regulations.